

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G08B 25/14	A1	(11) International Publication Number: WO 98/49663 (43) International Publication Date: 5 November 1998 (05.11.98)
(21) International Application Number: PCT/CA98/00373 (22) International Filing Date: 24 April 1998 (24.04.98) (30) Priority Data: 2,203,591 24 April 1997 (24.04.97) CA (71) Applicant (for all designated States except US): DIGITAL SECURITY CONTROLS LTD. [CA/CA]; 1645 Flint Road, Downsview, Ontario M3J 2J6 (CA). (72) Inventors; and (75) Inventors/Applicants (for US only): PETERSON, John [CA/CA]; 1645 Flint Road, Downsview, Ontario M3J 2J6 (CA). PARKER, James [CA/CA]; Apartment 14, 5 Sentinel Road, North York, Ontario M3M 2Y5 (CA). (74) Agents: JOHNSON, Douglas, S. et al.; Suite 301, 133 Richmond Street West, Toronto, Ontario M5H 2L7 (CA).		(81) Designated States: CA, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: HOME AUTOMATION AND SECURITY SYSTEM CONTROLLER

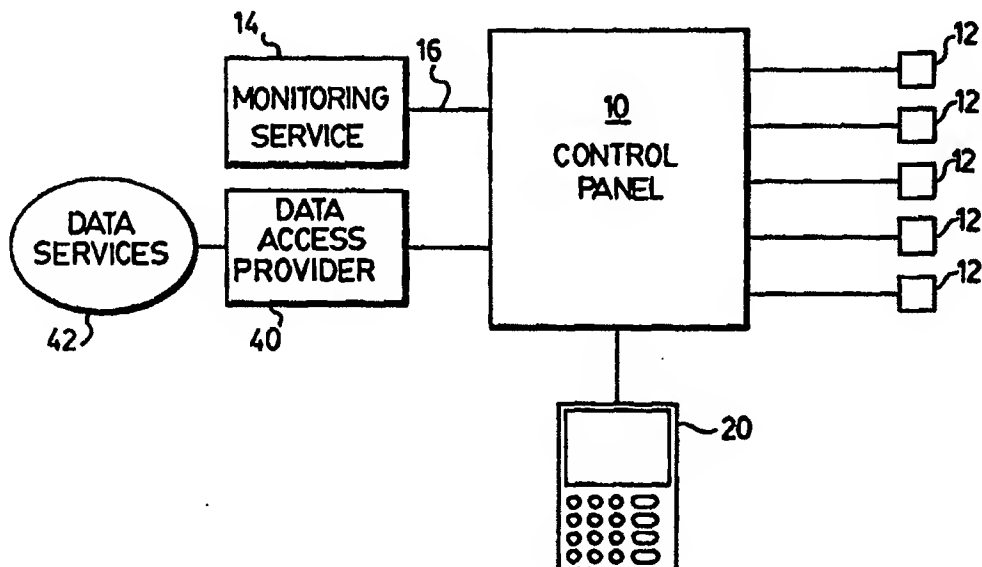

(57) Abstract

The present invention, in one aspect, is directed to a controller for controlling the function of components of a security system. The controller has a touch sensitive screen with a graphical representation of the security system and the components displayed on the screen. The function of the components of the security system are controlled by touching a portion of the screen having the component or security system to be controlled displayed thereon.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TITLE: HOME AUTOMATION AND SECURITY SYSTEM CONTROLLERFIELD OF THE INVENTION

5 The present invention relates to a controller for a home automation and security system and in particular, to a controller for a home automation and security system having a graphical interface.

10 BACKGROUND OF THE INVENTION

Security systems are becoming widespread in use with most commercial establishments and many residential establishments having security systems installed. Such security systems generally include a control panel which
15 controls the overall operation of the system, one or more keypads for user access to the system and various detectors and sensors. The control panel is generally mounted in an area of restricted access, such as a utility room or basement, and contains the system electronics, back-up
20 power sources, and may include an interface for a remote monitoring. Security systems are generally divided into several zones or areas of protection and each of these zones generally has one or more detection devices or sensors such as motion detectors, door or window contacts,
25 glass break detectors, detectors or shock sensors connected to it. In some security systems, smoke detectors or other fire detection devices may also be connected to the control panel. Security systems generally have one or more keypads which are used by the user to interface to the security
30 system. The key pad is used to send commands to the system to control the operation of the system and may also display system information. Such key pads generally have a status display which may include either individual indicators, such as light emitting diodes or may include a LCD or LED
35 display, which is capable of displaying a number of alpha-numeric characters and can display simple messages regarding the status and operation of the system. Such controllers may not be generally user friendly, as while

the controller may display the status of a zone as in a message such as "Zone 2 Open", the user of the system may not readily know where in the establishment Zone 2 is located, and may have to recall from their memory the set-up and programming of the security system. In an emergency or other panic situation, such information may not be easily recalled.

Attempts to overcome this drawback have been developed, such as the use of control panels which include a graphic of the layout of the establishment with LED displays which display the status of the system in areas of the establishment. However, such graphic controllers are generally part of the control panel which, as noted above, is generally in a location which is not easily accessible.

There have also been attempts to develop computer controlled systems where the interface with the security system is provided through a personal computer. While such a set-up is useful for programming of the security system, it is not generally usable for monitoring the status of the system in an emergency as it requires that the computer be constantly on, and that the computer be located in a location accessible to the user in the event of an emergency.

With the advances in computer technology, home automation, in terms of controlling lighting, temperature and other environmental factors in a home or office environment has become more widespread. There are many programs and interfaces available for personal computers which enable control of environmental factors such as lighting, heating, cooling, etc. in a home or office environment. However, once again, such a system requires the use of a fairly powerful home computer which may not be easily accessible at all times.

There thus remains a need for a simple to use controller for a home security or home automation system which provides for ease of programming and operation of the system and clearly understood status displays, especially
5 in emergency situations.

SUMMARY OF THE INVENTION

The present invention, in one aspect, is directed to a controller for controlling the function of components of a security system. The controller comprises a touch
10 sensitive screen, a graphical representation of the security system and the components displayed on the screen. The function of the components of the security system are controlled by touching a portion of the screen having the
15 component or security system to be controlled displayed thereon.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention are
20 illustrated in the attached drawings, wherein:

Figure 1 is a schematic view of a security system, utilizing the controller of the present invention;

Figure 2 is a perspective view of a preferred embodiment of the controller of the present invention..
25

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A typical security system is illustrated in Figure 1. Security system comprises a control panel 10 which controls the operation of the overall security system. A
30 number of detection devices 12 utilized for monitoring a zone or area of protection are connected to the control panel in a typical manner. Detection devices 12 may be any of the commonly utilized detection devices such as motion detectors, door contacts, glass break detectors or shock
35 sensors. While in Figure 1 the sensors 12 are shown as being hard wired to the control panel 10, wireless technology is in common use and may also be utilized for communication between the sensor 12 and the control panel

10. The security system may be connected to a remote monitoring station 14, utilizing any of the commonly employed methods of communication such as utilizing a telephone dialer sending messages to the remote monitoring station 14 using local telephone systems 16. In some situations, the connection between the control panel 10 and the remote monitoring location 14 may also be wireless, utilizing cellular telephone technology or other means of wireless communication. The controller 20 of the present invention is also connected to the control panel 10 for allowing the user to interface with the security system, to program the system and control the operation of the system and for displaying the status of the system and its various components.

Figure 2 illustrates a perspective view of the controller 20 of Figure 1. As illustrated, controller 20 has a case 22 typically constructed of plastic for containing the components of the controller 20. On the front of the case 22, there is provided a window 24 in which a suitable graphic display 26 is located. Preferably, the graphic display is a LED or LCD display having a display resolution sufficient to permit readily discernible graphical and alpha-numeric information to be displayed thereon. Such display is typically a LED or LCD display having a resolution of at least about 100 pixels in both the vertical and horizontal direction. Preferably, the display has a resolution of at least about 300 pixels horizontally and at least about 200 pixels vertically to enable the display to provide readily discernible graphical and alpha-numerical information. In the embodiment of the controller 20 as illustrated in Figure 2, the controller may be provided with a numeric key pad having numeric keys 28 typical of security system controllers. Controller 20 may also be provided with function keys or "hot" keys 30 for rapid access to various features of the controller 20.

The screen 26 of the controller 20 is preferably a touch sensitive screen whereby the operation of the security system may be controlled through touching of the screen 26 in the appropriate position. As illustrated in the Figures, the controller 20 may be set up to display a floor plan of the establishment at which the security system is located. The display could be programmed to show the location of the various sensors of the security system and their status. Should a user wish further information on a sensor in a particular location, or should they wish to program the functions of the security system with respect to the sensor, touching the screen in the appropriate location could bring up a selection list to check or program the operation of the sensors. Such selection list could be provided as a graphical menu overlay visible over the floor plan, or alternatively could be provided as a "hot" button list 32 displayed below the floor plan. Touching one of the menu items or buttons 32 in the hot button list would activate a command or provide further information on a sensor. Depending upon the function of the controller selected on the touch screen, the options available on the hot button list 32 could be varied.

The controller 20 of the present invention may also be utilized in conjunction with the control panel for controlling of home automation functions. Such home automation functions may include turning on and off selected lights at selected intervals, and other typical functions normally associated with home automation. For example, with the controller illustrated in Figure 2, one of the function keys 30 or one of the buttons on the hot button list 32 may provide for access to home automation functions. Once the home automation function protocol is activated, then the selected home automation functions associated with a particular area of the establishment may be controlled through the touch screen 26. Thus, for example, a user could touch a selected area on the floor

plan and then by selecting either a menu item or a button from the hot button list could program the turning on or turning off of the light in the selected area at selected times. Similarly, the system could be utilized to
5 influence the environmental conditions within the establishments by setting temperature set points for varying the temperature within the establishment at selected times. Thus, for example, in a home environment, the user could program the system to maintain a relatively
10 low temperature when no one is expected to be home and to program the system to increase the temperature just prior to the time when people are expected to arrive at the establishment.

15 In a preferred embodiment, the controller would also provide an interface to the utility services to monitor energy usage in the environment in which the controller is located. For example, in many locations, the meters utilized by utility services such as the
20 electrical power or hydro service, water and gas services are provided with an interface to allow downloading of information the the utility service for billing purposes. The controller of the present invention could utilize this interface to provide the user with an indication of the
25 user's usage of the energy source provided by the utility service. If the controller were also provided with the current rate schedule of each of the utility services, the controller could also display the cost of the services utilized.

30

In a preferred embodiment, the controller 20 of the present invention is also able to act as a information display for display of user selected information such as, for example, current weather, news headlines, sports or
35 stock markets quotes, etc. In this system, the controller would be interfaced to a data access provider 40 through a modem link associated with the control panel 10. The data access provider 40 would preferably have a user profile for

each individual location or establishment at which controllers 20 are located. This user profile would be selectable and programmable by the user such that they could select the specific types of information which they
5 wish to have displayed on the controller 20, as well as the times for display of such information. For example, a user could program their user profile to have the current weather conditions and weather forecast displayed on the controller display from the time they normally rise in the
10 morning until the time they would normally leave the establishment to go to work.

The data access provider 40 would retrieve the desired information from the required sources and repackage
15 the information for transmission to the controller of the user. Thus the data access provider may access news, sports, business information, stock market quotes, weather, etc. information sources to provide the information requested by the user in their profile. The relevant
20 information may be retrieved from commercial or other database providers 42 either by a direct link access or the database providers may be accessed through the Internet using any of the commonly employed methods or protocols. Some sources may be accessed through the World Wide Web
25 (WWW) using a suitably configured web browser. Other sources may be accessed by Telnet, Gopher, FTP or email, depending upon the access method necessary for retrieving the information from the database provider. When utilizing protocols other than the HTTP protocol used on the WWW, the
30 database provider may be accessed by the enhanced capabilities of Web Browsers or by applications separate from a Web Browser.

Once the information is retrieved, it is repackaged
35 in a form suitable for transmission to the controller 20. The repackaging required would depend upon such factors as the format of the data, the amount of the data, whether the information is to be abstracted or highlighted, and other

factors which would be apparent to those skilled in the art. Once the information is repackaged in the desired format, it is transmitted to the controller 20 for display on the graphical display. Depending upon the type and
5 amount of information to be displayed as well as the user's desired preferences, the information displayed on the graphical controller may first present a menu of information which the user can select from to display further information on a particular topic. For example, a
10 menu list giving the types of information such as news highlights, weather, sports scores, etc. may be initially displayed. The user could then select one of the items from the list and either a further user selectable sub-menu may be displayed or the information for the topic itself
15 may be displayed. The information could be displayed screen by screen, such that one screen of information is displayed for sufficient time for the user to read the information. The controller would, after the selected time, display the next screen of information.
20 Alternatively, the controller may display the information in its entirety by scrolling through all of the information in a topic. The scrolling rate of the display would be such as to enable the user to read and comprehend the information displayed. When the controller is configured
25 to present the information by scrolling, a hot button could also be provided to enable the user to pause the scrolling if they wished to view the information for a longer time such as for example to make written notes of the information. A scrolling display could also be used to
30 present all of the information continuously without the use of menu items. In these situations, the controller could scroll through all of the information that has been downloaded and once the end of the information has been reached, it could commence again at the beginning.

35

As the primary purpose of the controller 20 is the control of a security system, the controller 20 would be programmed to give priority to the monitoring of the

security system. The controller 20 could be constantly monitoring the conditions of the sensors 12 on a regular time interval, even when the controller is displaying the user selected information. If at any time the controller
5 20 detects the activation of any of the sensors 12, then the controller 20 would immediately cease the display of information and switch to the security system monitoring and control functions. Alternatively, the security system may be configured to be interruptible on receiving a
10 suitable signal from one of the sensors or detectors 12. Upon receipt of the interrupt or alarm condition signal from the sensor or detector 12, the controller 20 would automatically switch to the security system monitoring and control functions.

15

The functions of the data access provider 40 may be provided as an additional service provided by the security system monitoring service 14. In this type of setup, the communications between the data access provider 40 and the
20 controller 20 could use the same circuitry as the communication between the controller 20 and the security system monitoring service 14. The security system monitoring service could provide the information in the manner described above to the controller. In addition, the
25 security system monitoring service would also perform its usual functions and could, while communicating with the controller 20 to provide the user selected data, receive feedback on the status of the security system. If an alarm condition is detected in the security system, the security
30 system monitoring service 14 would immediately cease the functions of the data access provider and switch to the functions of the security system monitoring service.

The functions of the data access provider 40 and
35 the security system monitoring service 14 may also be provided by different entities. For example, the dealer who installed the security system or the manufacturer of the controller could provide the data access provider

service as an additional service to the purchaser. In many locations, the dealers or manufacturers do not themselves provide the security system monitoring but use a central service to provide such functions to their customers. In
5 these situations, the dealer or manufacturer could provide the data access provider services in the manner described above.

In setups in which the data access provider is
10 separate from the monitoring service, the communications between the controller and the data access provider may be distinct from the communications between the controller and the security system monitoring service, although some of the circuitry utilized for this communication may also be
15 used for the communication with the data access provider. For example, security systems which communicate with a monitoring service typically do so over the regular telephone system. These security systems are generally provided with a modem as part of the control panel which is
20 utilized for this communication. The modem circuitry for the communication with the monitoring service could also be utilized for the communication with the data access provider. In these situations, the security system would be configured to drop any connection with the data access
25 provider when an alarm condition is detected to enable the immediate communication with the monitoring service. Alternatively, the communication path for communicating with the data access provider may be provided with its own modem separate and apart from the modem for the monitoring
30 service. Once again however if the security system detects an alarm condition while communicating with the data access provider, the controller would immediately drop the connection to enable the security system to communicate with the monitoring service. This would be preferred, even
35 if the two modems were on separate telephone lines as it would be desirable that the controller would be dedicated to its primary function of security system monitoring and control functions in these situations.

Alarm systems according to the present invention which are capable of displaying information as described above may also be adapted to provide for other levels of notification of information which may be of importance to the user. In some circumstances, the data access provider may have the capability of interfacing with the alarm system to provide alerts to the user when particularly important information is being transmitted to the alarm system. This is of particular use where the data access provider is capable of initiating communication with the alarm system. In such a setup, as soon as the data access provider is made aware of information which would be of particular interest to the user, the data access provider may initiate a transmission and transmit the information to the alarm system. In addition to transmitting the information, the data access provider may also have the capability of interfacing with the alarm system to, for example, annunciate the arrival of the information.

20

It is also possible to provide for a dedicated connection to the data service provider. Currently, the technology exists for cable modem access, ADSL access or access through a signal on top of the electrical utility service amongst other technologies. All of these technologies provide for dedicated, continuous access to a data service provider. If such dedicated, continuous service is provided, then a higher degree of integration between the data access provider and the security system of the present invention is possible.

30

In circumstances where there is a dedicated connection or where the data access provider is able to initiate communication, some of the information communicated may be used to control functions of the alarm system. For example, if a weather advisory is issued for an area in which the security system is located, the data access provider could transmit the weather advisory and



35

alert the user to the existence of the weather advisory. Depending upon the severity of the advisory, the data access provider could instruct the security system to either display the advisory or using the sounding capabilities of the security system annunciate an alert. If the weather advisory is not severe, the data access provider could instruct the alarm system to sound a keypad buzzer or provide other sounding depending upon the capabilities of the keypad controller. If the weather advisory were severe such as a storm warning or tornado or hurricane watch, the data access provider could instruct the alarm system to sound the alarm annunciator. In addition to weather advisory, the system could also be configured to provide a warning of other events which may be of concern to the user. For example, users which have school age children on the premises, may have the data access provider monitor school closing and when a school closing is announced, could instruct the alarm system to notifier the user of the school closing. Other uses of such a feature of the alarm system of the present invention will be apparent to those skilled in the art.

Although various preferred embodiments of the present invention have been described herein in detail, it will be appreciated by those skilled in the art, that variations may be made thereto without departing from the spirit of the invention or the scope of the appended claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A controller for controlling the function of components of a security system comprising a touch sensitive screen with a graphical representation of the security system and the components displayed on the screen, the function of the components of the security system being controllable by touching a portion of the screen having the component or security system to be controlled displayed thereon.
2. A controller as claimed in claim 1 wherein the controller also provides for control of home automation functions by providing a display of the environment conditions capable of being controlled in the home automation functions.
3. A controller as claimed in claim 1 wherein the controller also provides for display of user selectable information provided by a data access provider.
4. A controller as claimed in claim 4 wherein the user selectable information is one or more items selected from the group consisting of weather information, news reports, sports information, and financial information.

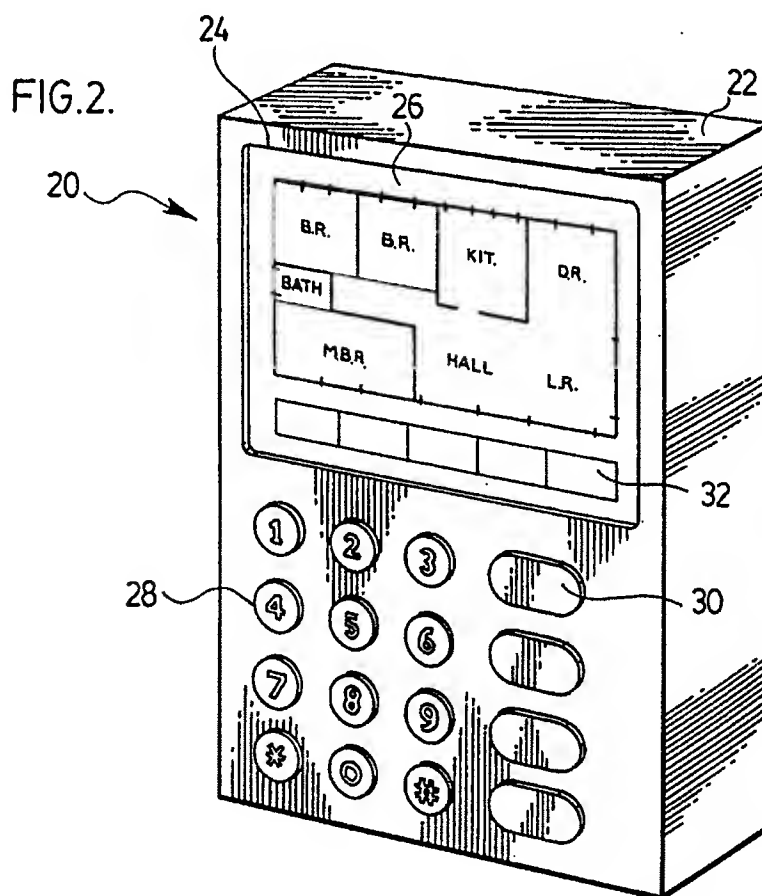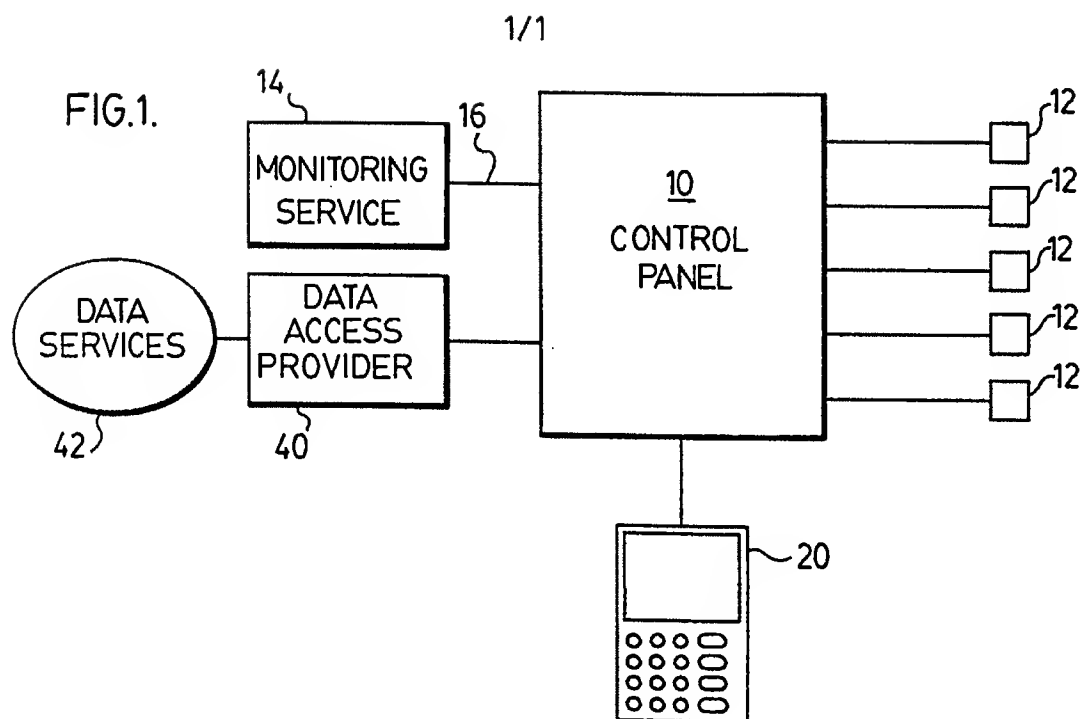

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/00373

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G08B25/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 559 270 A (N. V. PHILIPS GLOEILAMPENFABRIEKEN) 8 September 1993 see the whole document ---	1-4
A	EP 0 488 178 A (MITSUBISHI) 3 June 1992 see abstract -----	1,2

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

31 August 1998

Date of mailing of the international search report

04/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sgura, S

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/CA 98/00373

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 559270	A	08-09-1993	JP	6318114 A	15-11-1994
EP 488178	A	03-06-1992	DE	69110842 D	03-08-1995
			DE	69110842 T	07-03-1996
			JP	5040891 A	19-02-1993
			US	5237305 A	17-08-1993